

# SELF PRIMING WATER PUMP

## PTV101/110 PTX201/301/401

- SELF-PRIMING PUMP requires no water for subsequent pumping operation once initial pumping is done, and the pumping capacity is large.
- EFFICIENT, ECONOMICAL OPERATION is assured by directly coupled pump. It provides compactness and guarantees that power is not lost.
- WATER-RESISTING QUALITIES are prominent by adopting the mechanical seal made of ceramic-carbon, and the impellers made of special cast iron.
- HIGHLY ADVANCED ROBIN EX GASOLINE ENGINES, which ensure powerful and durable operation as well as easy maintenance and trouble-free operation.



PTV101

PTV110



PTX201





PTX301



PTX401

### PERFORMANCE CURVE

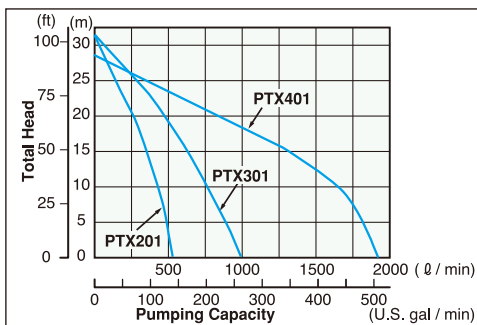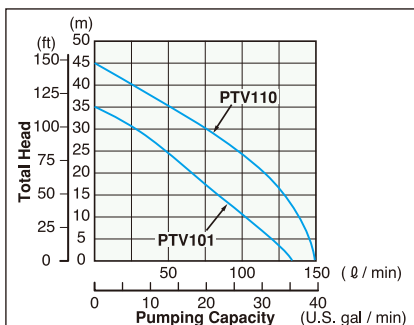

### STANDARD ACCESSORIES



PTV101/PTV110/PTX201/PTX201H

The above picture shows typical samples.  
Material and design may vary by models.

### SPECIFICATIONS

Model		PTV101	PTV110	PTX201	PTX301	PTX401
PUMP	Type	Self-priming, Centrifugal				
	Suction×Delivery Diameters (mm) [in.]	25.4×25.4 [1×1]		50.8×50.8 [2×2]	76.2×76.2 [3×3]	101.6×101.6 [4×4]
	Total Head (m) [ft]	35 [115]	45 [148]	32 [105]	32 [105]	28 [92]
	Maximum Delivery Volume (L/min) [U.S.gal/min]	130 [34]	150 [40]	520 [137]	1000 [264]	1800 [476]
	Suction Head (m) [ft]	8 [26]				
Axle Seal Material (Mechanical Seal)		Ceramic-carbon				
ENGINE	Model	EH025 EH035		EX13	EX17	EX27
	Type	Air-cooled, 4-stroke, OHV Gasoline engine		Air-cooled, 4-stroke, OHC Gasoline engine		
	Fuel	Automotive Unleaded Gasoline				
	Fuel Tank Capacity (L) [U.S.gal.]	0.5 [0.13]	0.65 [0.17]	2.3 [0.61]	3.2 [0.85]	5.6 [1.48]
Starting System		Recoil Starter				
Dimensions (L×W×H) (mm) [in.]	331×213×345 [13.0×8.4×13.6]	356×234×339 [14.0×9.2×13.3]	470×344×414 [18.5×13.5×16.3]	527×368×417 [20.7×14.5×16.4]	610×425×565 [24.0×16.7×22.2]	
Dry Weight (kg) [lb.]	5.8 [12.8]	6.7 [14.8]	24.9 [54.9]	27.6 [60.8]	44.5 [98.1]	
Standard Accessories		Engine Tool Kit (1set), Strainer (1pc.), Hose Coupling (2pcs.), Hose Band (3pcs.)				

Specifications are subject to change without notice.

# SELF PRIMING HIGH HEAD PUMP PTX201H



- HIGH HEAD, HIGH PRESSURE**  
Suitable for Sprinkler, Water-transfer to high place and Fire-fighting support works.
- EFFICIENT, ECONOMICAL OPERATION** is assured by directly coupled pump. It provides compactness and no loss of power.
- HIGHLY ADVANCED ROBIN EX GASOLINE ENGINE**, which ensure powerful and durable operation as well as easy maintenance and trouble-free operation.



# SELF PRIMING SEMI TRASH PUMP PTX201ST/301ST

- SEMI TRASH PUMPS** are designed for MIDDLE/HEAVY-DUTY applications where light debris prevents the use of standard water pumps.
- DURABLE AND TOUGH CONSTRUCTION**  
MECHANICAL SEAL is made of Silicon-Carbide. IMPELLER and INNER CASING are made of harder cast Iron for heavy-duty applications. PUMP CASING is made of die-cast aluminum.
- SELF-PRIMING PUMP** requires no water for subsequent pumping operation once initial pumping is done, and the delivery volume is extraordinarily large.

## PERFORMANCE CURVE

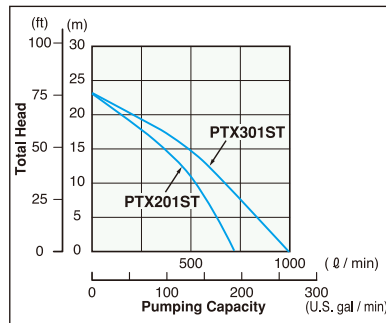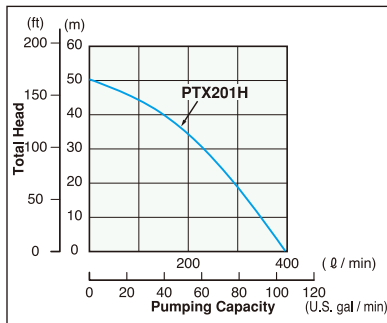

## STANDARD ACCESSORIES



## SPECIFICATIONS

Model		PTX201H	PTX201ST	PTX301ST
PUMP	Type	Self-priming, Centrifugal, High Head	Self-priming, Centrifugal, Semi Trash	
	Suction × Delivery Diameters (mm) [in.]	50.8 × 50.8 [2 × 2]	50.8 × 50.8 [2 × 2]	76.2 × 76.2 [3 × 3]
	Total Head (m) [ft]	50 [164]	23 [75]	23 [75]
	Maximum Delivery Volume (L/min) [U.S. gal/min]	400 [106]	700 [185]	1000 [264]
	Suction Head (m) [ft]		8 [26]	
Axle Seal Material (Mechanical Seal)		Ceramic-carbon	Silicon-carbide	
ENGINE	Model	EX17	EX13	EX17
	Type	Air-cooled, 4-stroke, OHC Gasoline engine		
	Fuel	Automotive Unleaded Gasoline		
	Fuel Tank Capacity (L) [U.S. gal.]	3.2 [0.85]	2.3 [0.61]	3.2 [0.85]
	Starting System	Recoil Starter		
Dimensions (L × W × H) (mm) [in.]	539 × 368 × 455 [21.2 × 14.5 × 17.9]	470 × 344 × 414 [18.5 × 13.5 × 16.3]	527 × 368 × 417 [20.7 × 14.5 × 16.4]	
Dry Weight (kg) [lb.]	27 [59.5]	24.9 [54.9]	27.6 [60.8]	
Standard Accessories		Engine Tool Kit (1set), Strainer (1pc.), Hose Coupling (2pcs.), Hose Band (3pcs.)		

Specifications are subject to change without notice.

# SELF PRIMING TRASH PUMP PTX201T/301T/401T

TRASH PUMPS are specially designed for HEAVY-DUTY USE such as CONSTRUCTION SITES. They are capable of sucking solid debris up to 31 mm in diameter with 4" pump, 31 mm in diameter with 3" pump, and 20 mm in diameter with 2" pump.

TOUGH AND POWERFUL PUMP  
MECHANICAL SEAL is made of Silicon-Carbide, which vastly increases the durability of mechanical seal. IMPELLER is made from Hi-chrome cast iron. INNER CASING is made of cast-iron with stainless steel liner, which ensures long life and low maintenance. PUMP CASING and FRONT COVER are made of cast aluminum.



PTX201T




PTX301T



PTX401T

## PERFORMANCE CURVE

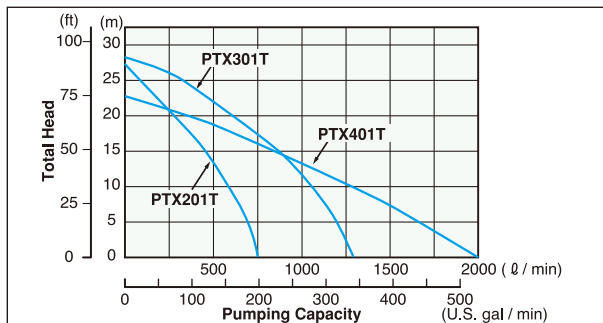

## STANDARD ACCESSORIES



PTX201T/PTX301T/PTX401T

The above picture shows typical samples. Material and design may vary by models.

## SPECIFICATIONS

Model		PTX201T	PTX301T	PTX401T
PUMP	Type	Self-priming, Centrifugal, Trash		
	Suction × Delivery Diameters (mm) [in.]	50.8 × 50.8 [2 × 2]	76.2 × 76.2 [3 × 3]	101.6 × 101.6 [4 × 4]
	Total Head (m) [ft]	27 [89]	28 [92]	23 [75]
	Maximum Delivery Volume (L/min) [U.S.gal/min]	750 [198]	1300 [343]	2000 [528]
	Suction Head (m) [ft]	8 [26]		
Axle Seal Material (Mechanical Seal)		Silicon-carbide		
ENGINE	Model	EX17	EX27	EX35
	Type	Air-cooled, 4-stroke, OHC Gasoline engine		
	Fuel	Automotive Unleaded Gasoline		
	Fuel Tank Capacity (L) [U.S.gal.]	3.2 [0.85]	5.6 [1.48]	6.8 [1.80]
Starting System		Recoil Starter		
Dimensions (L × W × H)	(mm) [in.]	570 × 436 × 397 [22.4 × 17.2 × 15.6]	672 × 484 × 610 [26.5 × 19.1 × 24.0]	730 × 485 × 635 [28.7 × 19.1 × 25.0]
Dry Weight	(kg) [lb.]	34.5 [76.1]	48.5 [106.9]	71.4 [157.4]
Standard Accessories		Engine Tool Kit (1set), Strainer (1pc.), Hose Coupling (2pcs.), Hose Band (3pcs.)		

Specifications are subject to change without notice.